

Datenblatt

N-TRON PoE+ 4-Port Midspan-Injektor

1000-POE4+



Bezeichnung	1000-POE4+
Modell	N-TRON PoE+ Midspan-Injektor
Schutzgrad	IP20
Typ	PoE Midspan-Injektor
Gesamtzahl Ports	8
10/100/1000 Kupfer	4
Übertragungsrate	10/100/1000 MBit/s
Betriebstemperatur	-40°C ... +85°C
Lagertemperatur	-40°C ... +85°C
Versorgungsspannung	22-49 VDC
Gehäusematerial	Metall
Montage	DIN-Hutschiene
Abmessungen	50,8 x 149,86 x 143,58 mm
Gewicht	660 g
Besonderheiten	MTBF: 2 Mio. Stunden Schock: 200G/10ms Vibration: 50G/Triaxial 5-200Hz ESD: +/- 16kV

Datenblatt

N-TRON PoE+ 4-Port Midspan-Injektor

1000-POE4+



Zertifizierung

ABS Type Approval for Shipboard Applications, ANSI/ISA 12.12.01-2015 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations, T4 UL508 Industrial Control Equipment
ANSI/ISA-12.12.01-2013, Class I and II, Division 2 and Class III, Divisions 1, CAN/CSA-C22.2 No. 213-15, Hazardous Locations, CAN/CSA-C22.2 No. 14-13, Industrial Control Equipment, Canada C22.2 No. 14; C22.2 No. 213-M1987 Class I, Division 2 Hazardous Locations, Designed to Comply with: IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control), Emissions: FCC Title 47, Part 15, Radio Frequency Devices, Subpart B, ANSI C63.4-2009; Industry Canada ICES-003, EN 55032, EN 61000-3-2, EN61000-3-3, EMC Directive 2014/30/EU, EN 55024, EN 61000-6-2, EN 61000-4-2 (ESD); EN 61000-4-3 (RFAM); EN 61000-4-4 (EFT); EN 61000-4-5 (SURGE); EN 61000-4-6 (RFCM); EN 61000-4-8 (PFMF); EN 61000-4-11 (VDI), LV Directive 2014/35/EU GOST-R, Product Safety: USA UL508 Industrial Control Equipment, Rail: EN 50155, EN50121, EN61373, RoHS

Anzahl PoE+ Ports (IEEE 802.3at)

4

1000-POE4+ Gigabit Midspan Injector

N-Tron Networking Series



▶▶▶ Industrial Unmanaged Gigabit PoE+

Red Lion's N-Tron® series 1000-POE4+ Gigabit PoE+ midspan injector simplifies network deployments by providing a robust solution for transmitting power and data to industrial network assets.

With 4 10/100/100BaseT(X) RJ45 ports (data in) and 4 10/100/1000BaseT(X) RJ45 PoE+ ports (data and power out) that support 30 watts per port, the 1000-POE4+ Gigabit PoE+ injector combines Gigabit data communications and power over a single Ethernet network cable. Ideal for deployment in security and surveillance, oil and gas, transportation, utilities and factory automation applications, the 1000-POE4+ injector provides auto-sensing plug-and-play performance for four PoE+ devices such as video cameras, IP phones and wireless access points.



APPLICATIONS

- > Security & Surveillance
- > Oil & Gas
- > Transportation
- > Utilities
- > Alternative Energy
- > Factory Automation

PRODUCT HIGHLIGHTS

- > Plug-and-Play Operation
- > IEEE 802.3af/at PoE+
- > Compact Size with Hardened Metal Enclosure
- > Wide -40° to 85°C Operating Temperature
- > Redundant 22 to 49 VDC Power Inputs

FEATURES & BENEFITS

- > 4 Gigabit PoE+ Ports
 - 10/100/1000Base-T(X) PoE+ copper ports
 - Provides Gigabit connectivity and 30 watts of power
- > Redundant 22 to 49 VDC Power Inputs
 - Keeps network running in the event of a power supply failure
 - Boosts power to meet PoE+ output requirements
- > Robust Industrial Design
 - Wide -40° to 85°C operating temperature range
 - UL/cUL: Class I, Division 2 Groups A, B, C, D, T4
- > Unmanaged Switch Operation
 - American Bureau of Shipping (ABS) type approval
 - IEEE 1613 for electric utility substations
 - Ultra-reliable > 2 million hours MTBF
- > Plug-and-play operation
 - Jumbo frame support
 - Full IEEE 802.3af/at compliance
 - Up to 8 Gb/s maximum throughput
 - Full wire speed communications

industrial
networking



▶▶▶ 1000-POE4+ Gigabit PoE+ Midspan Injector Specifications

SWITCH PROPERTIES

Operation: Unmanaged
IEEE Compliance: 802.3af/at
LED Status Indicators
Maximum Throughput: Up to 8 Gb/s
Communications: Full Wire Speed
MTBF: >2 million hours

POWER INPUT

Input Voltage Range: Dual 22-49 VDC power inputs
Steady Input Current (Full Load): 5.25 A @ 24 VDC
Steady Input Current (No Load): 280mA @ 24 VDC
Inrush: 59.9 A / 60us @ 24 VDC
BTU/HR: 50

POWER OVER ETHERNET

PoE Standard: IEEE 802.3af/at Gigabit mid-span PSE
PoE Output Power: 57 VDC / 30 W (25.5 W at PD) per port
Power Pin Assignment: Pins 1/2 (+), Pins 3/6 (-)
PSE Type: Type 2

CONNECTORS

10/100/1000Base-T: Eight (8) RJ-45 ports
Data In: Four (4) 10/100/1000Base-T ports
Data/PoE Out: Four (4) 10/100/1000Base-T ports

NETWORK MEDIA

10BaseT: ≥ Cat3 cable
100BaseTX: ≥ Cat5 cable
1000Base-T: ≥ Cat5e cable
802.3af (802.3at Type 1) PoE: ≥ Cat3 cable
802.3at Type 2 PoE+: ≥ Cat5 cable

RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)
Top: 1" (2.54 cm)

ENVIRONMENTAL

Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Operating Humidity: 10% to 95% (non condensing)
Operating Altitude: 0 to 10,000 ft.
Shock: 200 g @ 10 ms (bulkhead mounted)
Vibration/Seismic: 50 g, 5-200 Hz, triaxial (bulkhead mounted)

CERTIFICATION & COMPLIANCE

Product Safety: ANSI/ISA 12.12.01-2015 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations, T4 UL508 Industrial Control Equipment
CAN/CSA-C22.2 No. 213-15, Hazardous Locations
CAN/CSA-C22.2 No. 14-13, Industrial Control Equipment
Emissions: FCC Title 47, Part 15, Radio Frequency Devices, Subpart B, ANSI C63.4-2009; Industry Canada ICES-003, EN 55032, EN 61000-3-2, EN61000-3-3
Immunity: EN 55024, EN 61000-6-2, EN 61000-4-2 (ESD); EN 61000-4-3 (RFAM); EN 61000-4-4 (EFT); EN 61000-4-5 (SURGE); EN 61000-4-6 (RFEM); EN 61000-4-8 (PFMF); EN 61000-4-11 (VDI)
Rail: EN 50155, EN 50121 and EN 61373
Designed to Comply with: IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)
Other: ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

MECHANICAL

Case Dimensions:
Height: 5.9" (15 cm)
Width: 2.0" (5.1 cm)
Depth: 5.9" (15 cm)
Weight: 1.45 lbs (0.66 kg)
Ingress Protection: IP20
Mount: DIN rail (35 mm)

WARRANTY

3 Years on Design and Manufacturing Defects


ORDERING GUIDE

MODEL NUMBER	DESCRIPTION
1000-POE4+	4-Port Industrial Gigabit PoE+ Mid-Span Injector (4 10/100/1000Base-T Ports Data In, 4 10/100/1000Base-T Data/PoE+ Out)
NTPS-24-10	DIN-Rail Power Supply 10 Amp @ 24 VDC
1K26-PMK	Panel Mount Kit, 1000 Series

Specifications are subject to change. Visit www.redlion.net for more information.

▶▶▶ 1000-POE4+ Gigabit POE+ Midspan Injector Specifications

DIMENSIONS

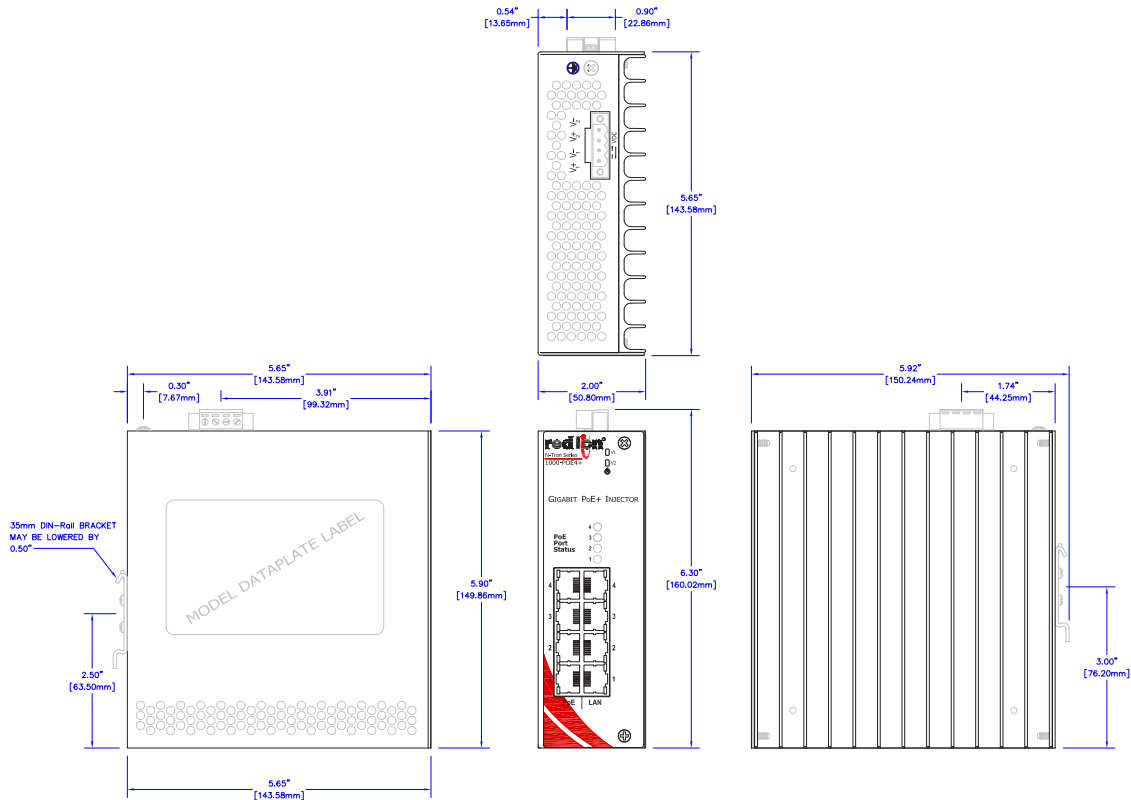

www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East

Africa
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0464 101016 © 2016 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.